

ZFD30P

6,000 Lb.

Diesel

Pneumatic Tire

Specifications & Features



ZFD30P

Authorized Distributor



Model (Diesel)		ZFD30P
Capacity	Lbs	6,000
Load Center	Inches	24
Engine	Engine Type	Diesel
Tires: Pneumatic	Front / Rear	8:15 x 15 (14pr) / 6:50 x 10 (10pr)
Fork Size Length	Inches	48
Mast Tilt – fwd/back	Degrees	6 / 12
Total Width - Add 17" if Dual drive	Inches	50.4
Mast Lift Height / Lowered Height – See chart below	Inches	118-217 / 84-96
Overhead Guard Height	Inches	84.3
Minimum Outside Turning Radius	Inches	95.1
Max Seat Height	Inches	44.8
Travel Speed	MPH	11.2 mph
Total Length – less forks	Inches	98.8
Service Weight	Lbs (Kilograms)	9,920
Diesel Yanmar 4TNE98	Hp/rpm	68.5/2500
Wheelbase	Inches	65
Brakes	Type	Hand/Foot
Diesel Engine	Make / model	Yanmar 4TNE98
Transmission - Power shift	Automatic	Automatic

Mast Type	Lowered Height (inches)	Raised Height (inches)	Free Lift (inches)	Tilt Forward (degrees)	Tilt Back (degrees)
Standard Mast	84	130	6	6	12
Standard Mast	88	138	6	6	12
Standard Mast	92	146	6	6	12
FFL Mast	84	130	65	6	12
Triple	84.6	192	60	6	6
Triple	86	197	62	6	6
Triple	96	217	72	6	6

Features & Benefits

- Yanmar Model 4TNE98, 4-cylinder Diesel Engine, 60 Horse Power, 3.319 Liters displacement. Water-cooled, four cycle, in-line overhead valve type. Variable speed, mechanical type governor; Bosch throttle type injection nozzle, high energy ignition system, heavy duty air cleaner with pre-cleaner, 12 volt electrical system

- Power shift (Automatic) transmission with separate inching and brake pedals, offers positive operation in tight working areas, especially beneficial working on ramps and inclines.

- High visibility design mast with side thrust rollers in the carriage for smoother operation and longer life of the mast components.

- Fully Hydrostatic Power Steering for smoother operation and many fewer parts for lower maintenance costs. This utilizes the largest cylinder and thickest steel for protection of any forklift in its class!

- Large hydraulically actuated Drum & Shoe type brakes for positive braking performance and ease of maintenance. Mechanical lever type parking brake for reliability.

- Control Handles are mounted on the dash for operator convenience and also allows the operator to enter/exit the operator compartment from either side of the machine comfortably.

- Tilt Steering Wheel
- Adjustable Seat
- Seat Belt
- Dual Head Lights
- Front Turn Signals
- Rear Turn Signals
- Brake Lights
- Back-up Lights
- Audible back-up Alarm
- Strobe Light
- Neutral Safety Switch
- Welded Overhead Guard
- Integral Fuel Tank
- Integral Hydraulic Tank
- High air intake
- Cyclone air cleaner
- Insulated engine cover
- Hand hold for entry
- Radiator overflow bottle
- Third valve & lever
- Horn
- Hour Meter
- Charge warning light
- Temperature warning light
- Oil pressure gauge
- Key switch
- Safety load backrest
- ITA Class III forks & carriage
- Easy access floor boards
- Rubber safety mat
- Meet or exceed all ANSI B56.1 safety standards for powered industrial trucks
- CE rated
- EPA Compliant




ZFD30P

Standard Equipment

Two Stage Mast
 Pneumatic Tires
 Yanmar Diesel Engine
 Auto Transmission
 Headlights
 Back Up Lights
 Turn Signals
 Hydro Steer Axle
 Mirrors
 Load Backrest
 Seat Belt
 Tilt Steer Wheel
 3rd Valve
 Operator Manual
 Standard Forks

Optional Equipment

Various Masts
 Standard mast
 Full Free Lift
 Triplex mast
 Various Tire Options
 CUSHION tires
 DUAL drive tires
 Solid Pneumatic
 Foam Filled
 Side Shifters
 4 Way Hydraulics
 Enclosed CAB
 Fork positioner
 Attachments
 Much More!

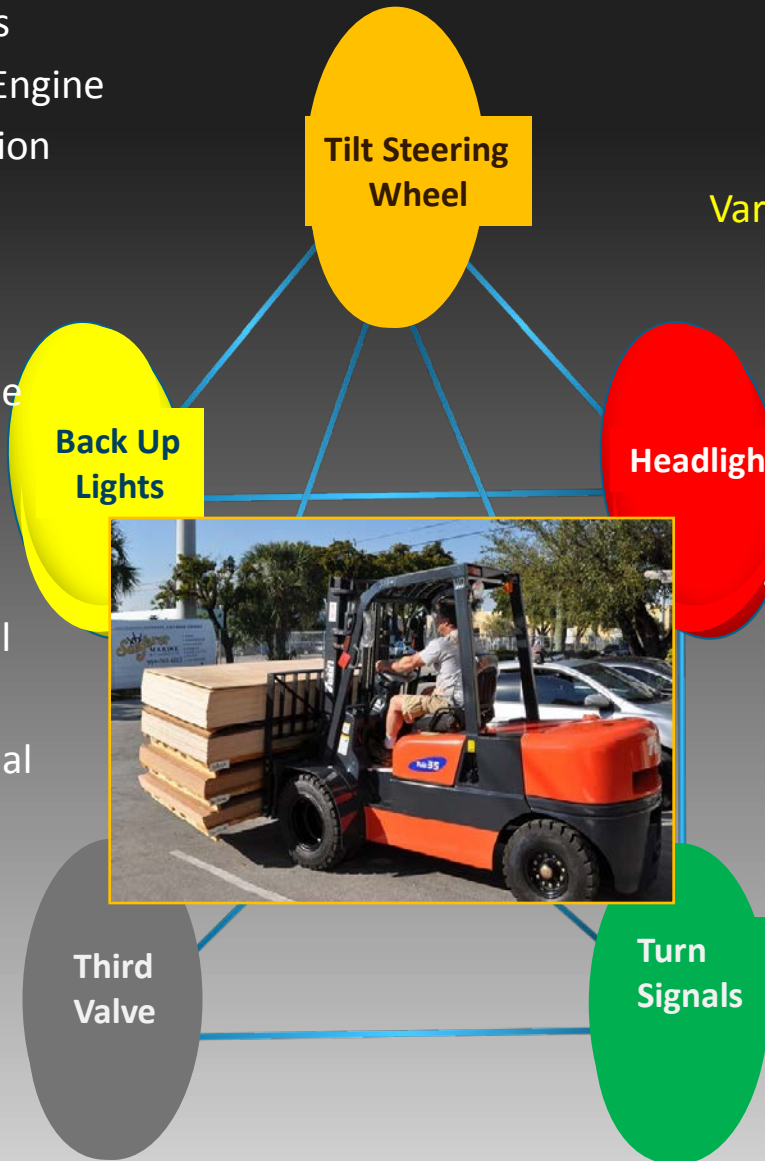

All photos may include optional equipment



Specifications are subject to change. Tailift reserves the right to make improvements and changes to their equipment at any time without prior notice.



ZFD30P
6000lb Diesel
Pneumatic